WASH PYDF WITHOUT ISASSEMBLE HOSE





Unbreakable PVDF Membrane

0.01

Membrane Pore Size 0.01 Micron



Hidden Pipe **System**



Preserves Mineral



Bacteria / Virus Guard



Daily Flush System



Stainless Steel Casing














GENAIR i5

GENAIR i5 - 2





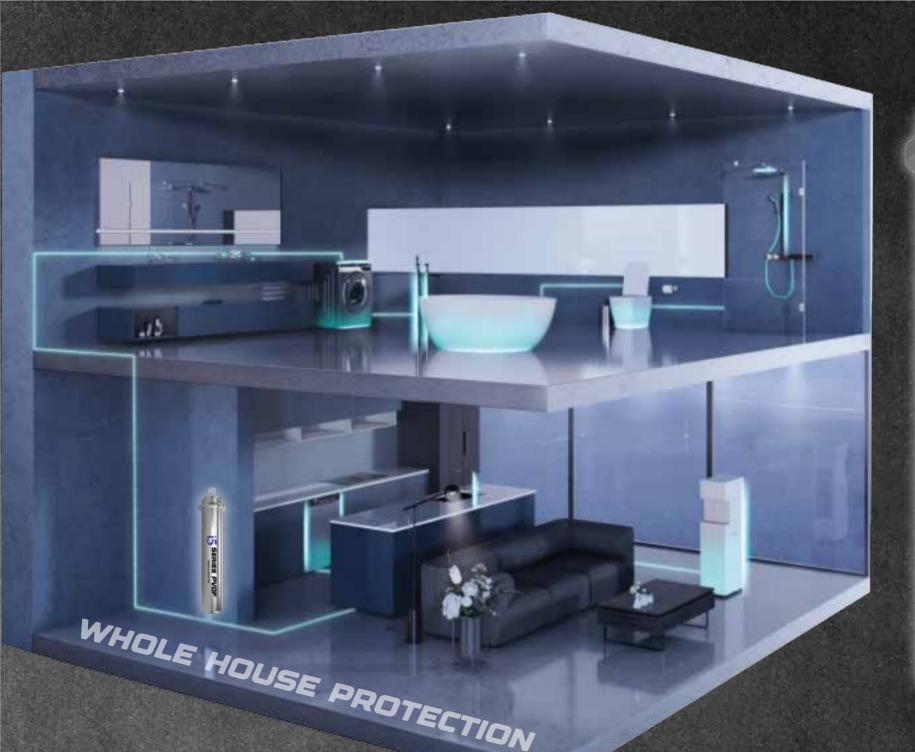



5 SEF

ERIES PVDF
Stainless Steel 304



Monitor Water Pressure



Stainless Steel Clamp





Remove Cartridge Without Pipe Removal



Hidden Pipe Designs





CARTRIDGE REMOVAL METHOD

No Disassemble Hose Needed














FOR INSTALLING. DO IT BACKWARDS

0.01 µm UF membrane

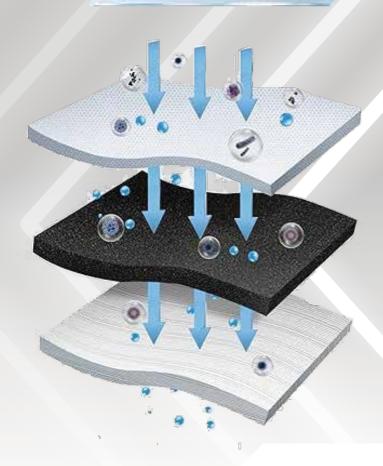





REMOVE













Industrail Oil



EXTERNAL PRESSURE

Hand Washable
No Clog
Durable
Long Life Span
Easy Maintainance
High Temperature Resistance









Flow Rate Gross Weight 6000 ℓ/Hrs 5.8 KGS Dimension Net Weight

76 x 21 x 27 cm 5.25 KGS


GENAIR i5 - 2



Flow Rate Gross Weight 6000 ℓ/Hrs 5.8 KGS Dimension Net Weight 76 x 21 x 27 cm 5.25 KGS

Principle Of External Pressure Filtration

All the Dirt, Mud, Virus, Bacteria Are Intercepted On The Surface Of The Membrane. The New Generation of PVDF Has Solved The Problem of Clogging

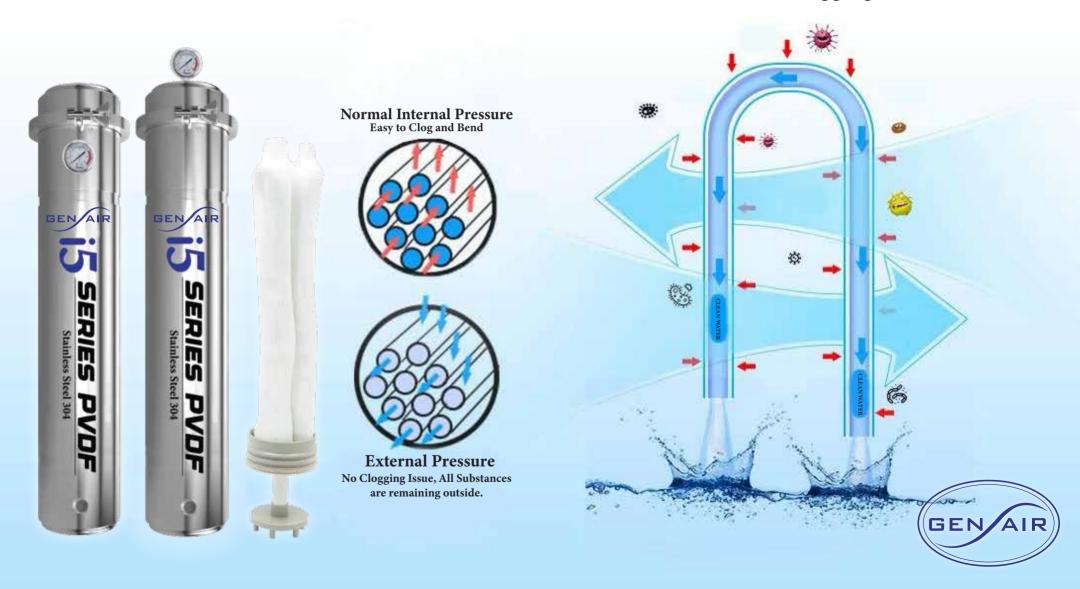



ADD-ONSGENAIR i5 Series





SUS 304 Water Tap



Hidden Stainless Steel Piping





实图 Real Product